



**APPLICATION FOR LOW VOLTAGE DIRECTIVE**  
**On Behalf of**  
**Fuzhou AOK LED Light Company Limited**  
**LED Parking Lot Light**  
**Model: See model list for 4**

**Prepared For : Fuzhou AOK LED Light Company Limited**  
**Floor 3 Building 23, No. 152 GUANPU RD Cangshan District**  
**Fuzhou, FUJIAN 350008 CHINA**

**Prepared By : Shenzhen Anbotek Compliance Laboratory**  
**Limited**

**1/F, Building D, Sogood Science and Technology Park,**  
**Sanwei community, Hangcheng Street, Bao'an District,**  
**Shenzhen, Guangdong, China. 518102**

**Tel: (86)755-26066440**

**Fax: (86)755-26014772**

**Date of Test: Mar. 22, 2018 to Apr. 02, 2018**

**Date of Report: Apr. 02, 2018**


**Report Number: SZALS180326004-01**

**TEST REPORT**  
**IEC 60598-2-3**

**Part 2: Particular requirements**  
**Section Three – Luminaires for road and street lighting**

**Report**

Report reference No.....: SZALS180326004-01  
 Compiled by.....: Augus Liu  
 Approved by.....: Nico Zou  
 Date of issue .....: Apr. 02, 2018  
 Contents.....: 49 pages report



*Augus Liu*  
*Nico Zou*

**Testing laboratory**

Name .....: Shenzhen Anbotek Compliance Laboratory Limited  
 Address .....: 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102  
 Testing location .....: Same as above

**Applicant:**

Name.....: Fuzhou AOK LED Light Company Limited  
 Address.....: Floor 3 Building 23, No. 152 GUANPU RD Cangshan District Fuzhou, FUJIAN 350008 CHINA

**Test specification**

Standard.....: IEC 60598-2-3:2002+A1:2011 used in conjunction with IEC 60598-1:2014  
 Procedure deviation .....: N.A.  
 Non-standard test method .....: N.A.


**Test item**

Description .....: LED Parking Lot Light  
 Trademark .....:   
 Model and/or type reference .....: See model list for "General product information"  
 Manufacturer.....: AOK LED Light Company Limited  
 Address.....: East of third floor, Building 1, St George's Industrial Park, Shajing street, Baoan District, Shenzhen, China (Second floor, Building 4, St George's Industrial Park)  
 Factory.....: Same as Manufacturer  
 Address.....: Same as Manufacturer  
 Rating(s) .....: AC100-277V, 50/60Hz  
 other details see "General product information"

<p><b>Test item particulars</b></p> <p>Classification of installation and use.....: LED Parking Lot Light</p> <p>Supply Connection.....: Non-detachable power cord without plug</p> <p>Classification of installation and use.....: Class I</p> <p>Degree of protection .....: IP65</p>
<p><b>Test case verdicts</b></p> <p>Test case does not apply to the test object .....: N(A.)</p> <p>Test item does meet the requirement .....: P(ass)</p> <p>Test item does not meet the requirement .....: F(ail)</p>
<p><b>Testing</b></p> <p>Date of receipt of test item .....: Mar. 22, 2018</p> <p>Date(s) of performance of test .....: Mar. 22, 2018 to Apr. 02, 2018</p>
<p><b>General remarks</b></p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>The test results presented in this report relate only to the item tested.</p> <p>Clause numbers between brackets refer to clauses in IEC 60598- 1.</p> <p>“(see remark #)” refers to a remark appended to the report.</p> <p>“(see Annex #)” refers to an annex appended to the report.</p> <p>Throughout this report a point is used as the decimal separator.</p> <p>According to the EU directives which have been aligned with EU NLF (new legislative framework), both of manufacturer and importer’s name and address shall be affixed on the product or, where that is not possible, on its packaging or in a document accompanying the product before the product is placed on the EU market.</p>
<p><b>Tests performed</b></p> <ul style="list-style-type: none"> <li>- EN 60598-1:2015</li> <li>- EN 60598-2-3:2003+A1:2011</li> <li>- EN 62031:2008+A1:2013+A2:2015</li> <li>- EN 62471:2008</li> <li>- EN 62493:2015</li> </ul> <p>The submitted samples were found to comply with the above specification.</p>
<p><b>Attachment to test report</b></p> <p>Attachment 1: Test report of EN 62471:2008</p> <p>Attachment 2: Test report of EN 62031:2008+A1:2013+A2:2015</p> <p>Attachment 3: Test report of EN 62493:2015</p> <p>Attachment 4: European differences according to EN 60598-2-3:2003+A1:2011</p> <p>Attachment 5: Photo documentation</p>



**Copy of marking plate**

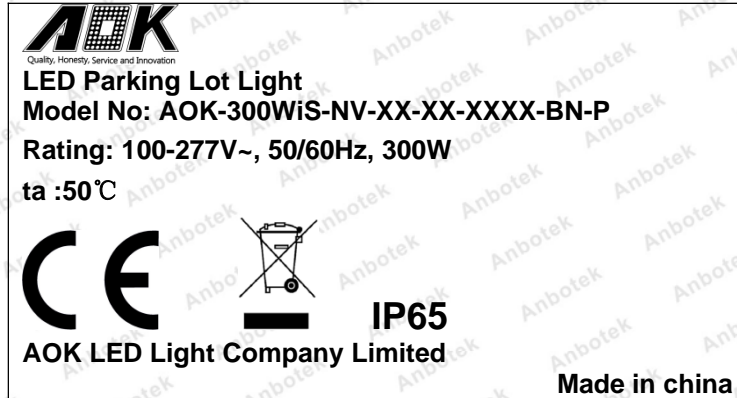

Rating label is stuck on the enclosure of LED Street Light (Size: height of WEEE mark at least 7mm, height of CE mark at least 5mm, height of letters and numbers at least 2mm)

**General product information**

LED Parking Lot Light for outdoor use, maximum mounting height is 15m.

Class I, IP65, ta:50°C.

**Model list**

Model No.	Input voltage(V)	Input power (W)
AOK-110WiS-NV-XX-XX-XXXX-BN-P	AC100-277V, 50/60Hz	110W
AOK-150WiS-NV-XX-XX-XXXX-BN-P	AC100-277V, 50/60Hz	150W
AOK-300WiS-NV-XX-XX-XXXX-BN-P	AC100-277V, 50/60Hz	300W

“NV” NV, Represents input voltage, NV = 100-277VAC  
 “XX” 1<sup>st</sup> for the brand of LED;  
 “XX” 2<sup>nd</sup> can be “00” for without sensor or “SN” for with sensor function;  
 “XXXX” can be any letters or digits for temperature colors;  
 “BN” can be any letters for beam angles.  
 “P” means installation way

All models have the same as construction.

Unless otherwise specified, models AOK-300WiS-NV-XX-XX-XXXX-BN-P was selected as representative models to perform all tests.



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
<b>3.2 (0)</b>	<b>GENERAL TEST REQUIREMENTS</b>		—
3.2 (0.1)	Information for luminaire design considered..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
3.2 (0.3)	More sections applicable..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>3.4 (2)</b>	<b>CLASSIFICATION OF LUMINAIRES</b>		—
3.4 (2.2)	Type of protection .....	Class I	—
3.4 (2.3)	Degree of protection..... :	IP65	—
3.4 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
3.4 (2.5)	Luminaire for normal use .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
3.4 (-)	Modes of installation of road or street lighting		—
	a) on a pipe	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	b) on a mast arm	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	c) on a post top	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	d) on span or suspension wires	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	e) on a wall	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>3.5 (3)</b>	<b>MARKING</b>		—
3.5 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
3.5 (3.3)	Additional information		P
	Language of instructions	English	P
3.5 (3.3.1)	Combination luminaires		N
3.5 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
3.5 (3.3.3)	Operating temperature		N
3.5 (3.3.4)	Symbol or warning notice		N
3.5 (3.3.5)	Wiring diagram		N
3.5 (3.3.6)	Special conditions		N
3.5 (3.3.7)	Metal halide lamp luminaire – warning		N
3.5 (3.3.8)	Limitation for semi-luminaires		N

IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.5 (3.3.9)	Power factor and supply current		N
3.5 (3.3.10)	Suitability for use indoors		N
3.5 (3.3.11)	Luminaires with remote control		N
3.5 (3.3.12)	Clip-mounted luminaire – warning		N
3.5 (3.3.13)	Specifications of protective shields		N
3.5 (3.3.14)	Symbol for nature of supply	~	P
3.5 (3.3.15)	Rated current of socket outlet		N
3.5 (3.3.16)	Rough service luminaire		N
3.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
3.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N
3.5 (3.3.19)	Protective conductor current in instruction if applicable		N
3.5 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N
3.5 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non-user replaceable light sources	P
	Cautionary symbol		N
3.5 (3.3.22)	Controllable luminaires, classification of insulation provided		N
3.5 (3.4)	Test with water	Rubbed lightly for 15 s with a piece of cloth soaked with water	P
	Test with hexane	For a further 15 s	P
	Legible after test		P
	Label attached		P
3.5 (-)	Additional information in instruction leaflet		P
	a) Design attitude		P
	b) Weight		P
	c) Overall dimensions		P
	d) Maximum projected area if applicable		P
	e) Cross-sectional area of wires if applicable		N
	f) Suitability for indoors use		N
	g) Dimensions of the compartment		N





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	h) Torque setting to be applied to bolts or screws		P
	i) Maximum mounting height	15m	P

<b>3.6 (4)</b>	<b>CONSTRUCTION</b>		—
3.6 (4.2)	Components replaceable without difficulty		N
3.6 (4.3)	Wireways smooth and free from sharp edges		P
<b>3.6 (4.4)</b>	<b>Lampholders</b>		N
3.6 (4.4.1)	Integral lampholder		N
3.6 (4.4.2)	Wiring connection		N
3.6 (4.4.3)	Lampholder for end-to-end mounting		N
3.6 (4.4.4)	Positioning		N
	- pressure test (N) .....		—
	After test the lampholder comply with relevant standard sheets and show no damage		N
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N
	- bending test (N) .....		—
	After test the lampholder have not moved from its position and show no permanent deformation		N
3.6 (4.4.5)	Peak pulse voltage		—
3.6 (4.4.6)	Centre contact		N
3.6 (4.4.7)	Parts in rough service luminaires resistant to tracking		N
3.6 (4.4.8)	Lamp connectors		N
3.6 (4.4.9)	Caps and bases correctly used		N
3.6 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N
<b>3.6 (4.5)</b>	<b>Starter holders</b>		N
	Starter holder in luminaires other than class II		N
	Starter holder class II construction		N
<b>3.6 (4.6)</b>	<b>Terminal blocks</b>		N
	Tails		N
	Unsecured blocks		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
<b>3.6 (4.7)</b>	<b>Terminals and supply connections</b>		P
3.6 (4.7.1)	Contact to metal parts		P
3.6 (4.7.2)	Test 8 mm live conductor		P
	Test 8 mm earth conductor		P
3.6 (4.7.3)	Terminals for supply conductors		P
3.6 (4.7.3.1)	Welded method and material		N
	- stranded or solid conductor		N
	- spot welding		N
	- welding between wires		N
	- Type Z attachment		N
	- mechanical test according to 15.6.2		N
	- electrical test according to 15.6.3		N
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N
3.6 (4.7.4)	Terminals other than supply connection		P
3.6 (4.7.5)	Heat-resistant wiring/sleeves		N
3.6 (4.7.6)	Multi-pole plug		N
	- test at 30 N		N
<b>3.6 (4.8)</b>	<b>Switches</b>		N
	- adequate rating		N
	- adequate fixing		N
	- polarized supply		N
	- compliance with IEC 61058-1 for electronic switches		N
<b>3.6 (4.9)</b>	<b>Insulating lining and sleeves</b>		N
3.6 (4.9.1)	Retainment		N
	Method of fixing.....:		N
3.6 (4.9.2)	Insulated linings and sleeves:		N
	Resistant to a temperature > 20 °C to the wire temperature or		N
	a) & c) Insulation resistance and electric strength		N
	b) Ageing test. Temperature (°C).....:		N
<b>3.6 (4.10)</b>	<b>Double or reinforced insulation</b>		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.6 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N
	Safe installation fixed luminaires		N
	Capacitors and switches		N
	Interference suppression capacitors according to IEC 60384-14		N
3.6 (4.10.2)	Assembly gaps:		N
	- not coincidental		N
	- no straight access with test probe		N
3.6 (4.10.3)	Retention of insulation:		N
	- fixed		N
	- unable to be replaced; luminaire inoperative		N
	- sleeves retained in position		N
	- lining in lampholder		N
1.6 (4.10.4)	Protective impedance device		N
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N
	Y1 or Y2 capacitors comply with IEC 60384-14		N
	Resistors comply with test (a) in 14.1 of IEC 60065		N
<b>3.6 (4.11)</b>	<b>Electrical connections and current-carrying parts</b>		P
3.6 (4.11.1)	Contact pressure		P
3.6 (4.11.2)	Screws:		P
	- self-tapping screws		P
	- thread-cutting screws		N
3.6 (4.11.3)	Screw locking:		N
	- spring washer		N
	- rivets		N
3.6 (4.11.4)	Material of current-carrying parts		P
3.6 (4.11.5)	No contact to wood or mounting surface		P
3.6 (4.11.6)	Electro-mechanical contact systems		N
<b>3.6 (4.12)</b>	<b>Screws and connections (mechanical) and glands</b>		P
3.6 (4.12.1)	Screws not made of soft metal		P

IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	Screws of insulating material		P
	Torque test: torque (Nm); part..... :	Fixed lampshade :0.5Nm	P
	Torque test: torque (Nm); part..... :	Fixed metal shell:1.2Nm	P
	Torque test: torque (Nm); part..... :		N
3.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N
3.6 (4.12.4)	Locked connections:		N
	- fixed arms; torque (Nm)..... :		N
	- lampholder; torque (Nm)..... :		N
	- push-button switches; torque 0,8 Nm..... :		N
3.6 (4.12.5)	Screwed glands; force (Nm)..... :		N
<b>3.6 (4.13)</b>	<b>Mechanical strength</b>		P
3.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)..... :		N
	- other parts; energy (Nm)..... :	0.7Nm	P
	a) live parts		P
	b) linings		N
	c) protection		P
	d) covers		P
3.6 (4.13.3)	Straight test finger		P
3.6 (4.13.4)	Rough service luminaires		N
	- IP54 or higher		N
	a) fixed		N
	b) hand-held		N
	c) delivered with a stand		N
	d) for temporary installations and suitable for mounting on a stand		N
3.6 (4.13.6)	Tumbling barrel		N
<b>3.6 (4.14)</b>	<b>Suspensions, fixings and means of adjusting</b>		P
3.6 (4.14.1)	Mechanical load:		P
	A) four times the weight	Max.10.85X4Kg=43.4Kg	P
	B) torque 2,5 Nm		P
	C) bracket arm; bending moment (Nm)..... :		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	D) load track-mounted luminaires		N
	E) clip-mounted luminaires, glass-shelve. Thickness (mm) .....		N
	Metal rod. diameter (mm) .....		N
	Fixed luminaire or independent control gear without fixing devices		N
3.6 (4.14.2)	Load to flexible cables		N
	Mass (kg) .....		—
	Stress in conductors (N/mm <sup>2</sup> ) .....		N
	Mass (kg) of semi-luminaire .....		N
	Bending moment (Nm) of semi-luminaire .....		N
3.6 (4.14.3)	Adjusting devices:		N
	- flexing test; number of cycles.....		N
	- strands broken.....		N
	- electric strength test afterwards		N
3.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N
3.6 (4.14.5)	Guide pulleys		N
3.6 (4.14.6)	Strain on socket-outlets		N
<b>3.6 (4.15)</b>	<b>Flammable materials</b>		P
	- glow-wire test 650°C.....	See Test Table 3.15 (13.3.2)	P
	- spacing ≥30 mm		N
	- screen withstanding test of 13.3.1		N
	- screen dimensions		N
	- no fiercely burning material		P
	- thermal protection		N
	- electronic circuits exempted		N
3.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N
	a) construction		N
	b) temperature sensing control		N
	c) surface temperature		N
<b>3.6 (4.16)</b>	<b>Luminaires for mounting on normally flammable surfaces</b>		N





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	No lamp control gear.....:	(compliance with Section 12)	N
3.6 (4.16.1)	Lamp control gear spacing:		N
	- spacing 35 mm		N
	- spacing 10 mm		N
3.6 (4.16.2)	Thermal protection:		N
	- in lamp control gear		N
	- external		N
	- fixed position		N
	- temperature marked lamp control gear		N
3.6 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N
<b>3.6 (4.17)</b>	<b>Drain holes</b>		N
	Clearance at least 5 mm		N
<b>3.6 (4.18)</b>	<b>Resistance to corrosion</b>		N
3.6 (4.18.1)	- rust-resistance		N
3.6 (4.18.2)	- season cracking in copper		N
3.6 (4.18.3)	- corrosion of aluminium		N
3.6 (4.19)	Igniters compatible with ballast		N
3.6 (4.20)	Rough service vibration		N
<b>3.6 (4.21)</b>	<b>Protective shield</b>		N
3.6 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N
	Shield of glass if tungsten halogen lamps		N
3.6 (4.21.2)	Particles from a shattering lamp not impair safety		N
3.6 (4.21.3)	No direct path		N
3.6 (4.21.4)	Impact test on shield		N
	Glow-wire test on lamp compartment.....:	See Test Table 3.15 (13.3.2)	N
3.6 (4.22)	Attachments to lamps not cause overheating or damage		N
3.6 (4.23)	Semi-luminaires comply Class II		N
<b>3.6 (4.24)</b>	<b>Photobiological hazards</b>		P
3.6 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N

IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.6 (4.24.2)	Retinal blue light hazard		N
	Class of risk group assessed according to IEC/TR 62778 .....		N
	Luminaires with $E_{thr}$ :		N
	a) Fixed luminaires		N
	- distance x m, borderline between RG1 and RG2... :	RG0	N
	- marking and instruction according 3.2.23		N
	b) Portable and handheld luminaires		N
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N
<b>3.6 (4.25)</b>	<b>Mechanical hazard</b>		P
	No sharp point or edges		P
<b>3.6 (4.26)</b>	<b>Short-circuit protection</b>		N
3.6 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N
3.6 (4.26.2)	Short-circuit test with test chain according 4.26.3		N
	Test chain not melt through		N
	Test sample not exceed values of Table 12.1 and 12.2		N
<b>3.6 (4.27)</b>	<b>Terminal blocks with integrated screwless earthing contacts</b>		N
	Test according Annex V		N
	Pull test of terminal fixing (20 N)		N
	After test, resistance < 0,05 $\Omega$		N
	Pull test of mechanical connection (50 N)		N
	After test, resistance < 0,05 $\Omega$		N
	Voltage drop test, resistance < 0,05 $\Omega$		N
<b>3.6 (4.28)</b>	<b>Fixing of thermal sensing control</b>		N
	Not plug-in or easily replaceable type		N
	Reliably kept in position		N
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N

IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	Not outside the luminaire enclosure		N
	Test of adhesive fixing:		N
	Max. temperature on adhesive material (°C) ..... :		—
	100 cycles between t min and t max		N
	Temperature sensing control still in position		N
<b>3.6 (4.29)</b>	<b>Luminaires with non-replaceable light source</b>		N
	Not possible to replace light source		N
	Live part not accessible after parts have been opened by hand or tools		N
<b>3.6 (4.30)</b>	<b>Luminaires with non-user replaceable light source</b>		P
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		P
	Minimum two fixing means	SELV	P
<b>3.6 (4.31)</b>	<b>Insulation between circuits</b>		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N
<b>3.6 (4.31.1)</b>	<b>SELV circuits</b>		P
	Used SELV source		P
	Voltage ≤ ELV		P
	Insulating of SELV circuits from LV supply		P
	Insulating of SELV circuits from other non SELV circuits		N
	Insulating of SELV circuits from FELV		N
	Insulating of SELV circuits from other SELV circuits		N
	SELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to enter socket-outlets of other voltage systems		N
	Socket outlets does not admit plugs of other voltage systems		N
	Plugs and socket-outlets does not have protective conductor contact		N





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.6 (4.31.2)	FELV circuits		N
	Used FELV source		N
	Voltage $\leq$ ELV		N
	Insulating of FELV circuits from LV supply		N
	FELV circuits insulated from accessible parts according Table X.1		N
	Plugs not able to enter socket-outlets of other voltage systems		N
	Socket outlets does not admit plugs of other voltage systems		N
	Socket-outlets does not have protective conductor contact		N
3.6 (4.31.3)	Other circuits		N
	Other circuits insulated from accessible parts according Table X.1		N
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N
	- conductive parts are connected together		N
	- test according 7.2.3		N
	- conductive part not cause an electric shock in case of an insulation fault		N
	- equipotential bonding in master/slave applications		N
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N
	- slave luminaire constructed as class I		N
3.6 (4.32)	<b>Overvoltage protective devices</b>		N
	Comply with IEC 61643-11		N
	External to controlgear and connected to earth:		N
	- only in fixed luminaires		N
	- only connected to protective earth		N
3.6.1 (-)	At least IP X3 or X5 respectively. IP .....	IP65	P
	Column-integrated luminaires:		N
	- parts below 2,5 m. IP .....		N
	- parts above 2,5 m. IP .....		N
3.6.2 (-)	Suspension on span wires		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.6.3 (-)	Means for attaching the luminaire or external parts to its support appropriate to the weight		P
3.6.3.1 (-)	Static load test		P
	- drag coefficient..... :	1.2	P
	- loaded area (m <sup>2</sup> )..... :	0.1785	P
	- used load (N)..... :	426.26	P
	- measured deformation (cm/m) ..... :	0.5	P
	- no rotation		P
3.6.4 (-)	Adjustable lampholders		N
3.6.5 (-)	Luminaires installed above 5 m, glass covers shall be:		N
	a) glass that fractures into small pieces (test according to 3.6.5.1), or		N
	b) glass having a high impact shock resistance (test according to 3.6.5.2), or		N
	c) protected by any means to retain glass fragments		N
	For tunnel luminaires 3.6.5.1 apply		N
	Method of protection declared by the manufacturer		N
3.6.5.1 (-)	Protection by the use of glass that fractures into small pieces		N
	- number of particles is more than 60..... :		N
3.6.5.2 (-)	Protection by the use of high impact resistant glass		N
3.6.5.2.1 (-)	Glass covers have high mechanical strength		N
	Test according IEC 62262 with test apparatus according IEC 60068-2-75 with impact energy of 5J on preconditioned sample		N
3.6.5.2.2 (-)	Glass covers not break into large pieces		N
	- test according 3.6.5.1, number of particles is more than 20..... :		N
3.6.6 (-)	Connection compartment of column-integrated luminaire		N
	- provides adequate space		N
	- means for attachment		N
	- means for attachment of metal corrosion-resistant		N
3.6.7 (-)	Compliance with ISO standard or other..... :		N
3.6.8 (-)	Doors of column-integrated luminaires:		N
	- corrosion-resistant		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- opening only possible for an authorized person		N
	- impact test 5 Nm		N
	- sample show no damage		N
3.6.9 (-)	Column-integrated luminaire:		N
	- dimension of the cable entry slot (mm).....:		N
	- cable path from the slot to the connection compartment (mm) .....		N
	- cable path free from obstruction that might cause abrasion of the cable		N

<b>3.7 (11)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		—
3.7 (11.2)	Creepage distances and clearances.....:	See Table 3.7 (11.2)	P
	Impulse withstand category (Normal category II) (Category III Annex U, Table U.1)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—

<b>3.8 (7)</b>	<b>PROVISION FOR EARTHING</b>		—
3.8 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 Ω.....:	0.029Ω	P
	Self-tapping screws used		P
	Thread-forming screws		N
	Thread-forming screw used in a groove		N
	Earth makes contact first		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N
	Protective earthing of the luminaire not via built-in control gear		N
3.8 (7.2.2 + 7.2.3)	Earth continuity in joints, etc.		N
3.8 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N
3.8 (7.2.5)	Earth terminal integral part of connector socket		N





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict

3.8 (7.2.6)	Earth terminal adjacent to mains terminals		P
3.8 (7.2.7)	Electrolytic corrosion of the earth terminal		P
3.8 (7.2.8)	Material of earth terminal		P
	Contact surface bare metal		P
3.8 (7.2.10)	Class II luminaire for looping-in		N
	Double or reinforced insulation to functional earth		N
3.8 (7.2.11)	Earthing core coloured green-yellow		P
	Length of earth conductor		P
3.8.1 (-)	Attachment prevented from rotation		N

3.9 (14)	SCREW TERMINALS		—
	Separately approved; component list	(see Annex 1)	N
	Part of the luminaire	(see Annex 3)	N

3.9 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		—
	Separately approved; component list.....	(see Annex 1)	P
	Part of the luminaire.....	(see Annex 4)	N

3.10 (5)	EXTERNAL AND INTERNAL WIRING		—
3.10 (5.2)	Supply connection and external wiring		P
3.10 (5.2.1)	Means of connection.....	Non-detachable supply cord without plug	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV $\leq 25$ V a.c./60 V d.c. or protected from outdoor environment		N
3.10 (5.2.2)	Type of cable.....	H05RN-F	P
	Nominal cross-sectional area (mm <sup>2</sup> ).....	3X1.0mm <sup>2</sup>	P
	Cables equal to IEC 60227 or IEC 60245	IEC 60245	—
3.10 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
3.10 (5.2.5)	Type Z not connected to screws		N
3.10 (5.2.6)	Cable entries:		—
	- suitable for introduction		P
	- adequate degree of protection		P



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.10 (5.2.7)	Cable entries through rigid material have rounded edges		P
3.10 (5.2.8)	Insulating bushings:		N
	- suitably fixed		N
	- material in bushings		N
	- material not likely to deteriorate		N
	- tubes or guards made of insulating material		N
3.10 (5.2.9)	Locking of screwed bushings		N
3.10 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		N
3.10 (5.2.10.1)	Cord anchorage for type X attachment:		N
	a) at least one part fixed		N
	b) types of cable		N
	c) no damaging of the cable		N
	d) whole cable can be mounted		N
	e) no touching of clamping screws		N
	f) metal screw not directly on cable		N
	g) replacement without special tool		N
	Glands not used as anchorage		N
	Labyrinth type anchorages		N
3.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Type Y	P
3.10 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N)..... : 60N		P
	- torque test: torque (Nm)..... : 0.25Nm		P



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- displacement ≤ 2 mm	0.9mm	P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
3.10 (5.2.11)	External wiring passing into luminaire		N
3.10 (5.2.12)	Looping-in terminals		N
3.10 (5.2.13)	Wire ends not tinned		N
	Wire ends tinned: no cold flow		P
3.10 (5.2.14)	Mains plug same protection		N
	Class III luminaire plug		N
	No unsafe compatibility		N
3.10 (5.2.16)	Appliance inlets (IEC 60320)		N
	Installation couplers (IEC 61535)		N
	Other appliance inlet or connector according relevant IEC standard		N
3.10 (5.2.17)	No standardized interconnecting cables properly assembled		N
3.10 (5.2.18)	Used plug in accordance with		N
	- IEC 60083		N
	- other standard		N
<b>3.10 (5.3)</b>	<b>Internal wiring</b>		P
3.10 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N
	- not delivered/ mounting instruction		N
	- factory assembled		N
	- socket outlet loaded (A)..... :		N
	- temperatures..... :	(see Annex 2)	N
	Green-yellow for earth only		N





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
3.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N
	Cross-sectional area (mm <sup>2</sup> )..... :		N
	Insulation thickness		N
	Extra insulation added where necessary		N
3.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Adequate cross-sectional area and insulation thickness		P
3.10 (5.3.1.3)	Double or reinforced insulation for class II		N
3.10 (5.3.1.4)	Conductors without insulation		N
3.10 (5.3.1.5)	SELV current-carrying parts		P
3.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N
3.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N
	Joints, raising/lowering devices		N
	Telescopic tubes etc.		N
	No twisting over 360°		P
3.10 (5.3.3)	Insulating bushings:		N
	- suitable fixed		N
	- material in bushings		N
	- material not likely to deteriorate		N
	- cables with protective sheath		N
3.10 (5.3.4)	Joints and junctions effectively insulated		N
3.10 (5.3.5)	Strain on internal wiring		P
3.10 (5.3.6)	Wire carriers		N
3.10 (5.3.7)	Wire ends not tinned		N
	Wire ends tinned: no cold flow		P
3.10.1 (-)	Cord anchorage if applicable		P
	- pull test: 25 times; pull (N)..... :	60N	P



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- torque test: torque (Nm)..... :	0,25Nm	P

3.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		—
3.11 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		P
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N
	Basic insulation only accessible under lamp or starter replacement		N
	Protection in any position		P
	Double-ended tungsten filament lamp		N
	Insulation lacquer not reliable		N
	Double-ended high pressure discharge lamp		N
	Relevant warning according to 3.2.18 fitted to the luminaire		N
3.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N
3.11 (8.2.3.a)	Class II luminaire:		N
	- basic insulated metal parts not accessible during starter or lamp replacement		N
	- basic insulation not accessible other than during starter or lamp replacement		N
	- glass protective shields not used as supplementary insulation		N
3.11 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N
3.11 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N
	Ordinary luminaire:		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- voltage under load (V)..... :		N
	- no-load voltage (V)..... :		N
	- touch current if applicable (mA) ..... :		N
	One conductive part insulated if required		N
	Other than ordinary luminaire:		N
	- nominal voltage (V) ..... :		N
	Class III luminaire only for connection to SELV		N
	Class III luminaire not provided with means for protective earthing		N
1.11 (8.2.4)	Portable luminaire have protection independent of supporting surface		N
3.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
3.11 (8.2.6)	Covers reliably secured		P
3.11 (8.2.7)	Luminaire other than below with capacitor > 0,5 μF not exceed 50 V 1 min after disconnection	Approved LED driver	N
	Portable luminaire with capacitor > 0,1 μF (0.25) not exceed 34 V 1 s after disconnection		N
	Other luminaires with capacitor > 0,1 μF (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N

<b>3.12 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		—
3.12.2 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 3.13		—
3.12 (12.3)	Endurance test:		P
	- mounting- position..... :	As in normal use	—
	- test temperature (°C)..... :	60°C	—
	- total duration (h)..... :	240 h	—
	- supply voltage: Un factor; calculated voltage (V).... :	304.7V	—
	- lamp used..... :	LED	—
3.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- no damage to track system		N
	- marking legible		P
	- no cracks, deformation etc.		P
3.12 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
3.12 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	N
3.12 (12.6)	Thermal test (failed lamp control gear condition):		N
3.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A) .....		—
	- case of abnormal conditions.....		—
	- electronic lamp control gear		N
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured mounting surface temperature (°C) at 1,1 Un.....		N
	- calculated mounting surface temperature (°C) .....		N
	- track- mounted luminaires		N
3.12 (12.6.2)	Temperature sensing control		N
	- case of abnormal conditions.....		—
	- thermal link		N
	- manual reset cut- out		N
	- auto reset cut- out		N
	- measured mounting surface temperature (°C).....		N
	- track- mounted luminaires		N
3.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N
3.12 (12.7.1)	Luminaire without temperature sensing control		N
3.12 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N
	Test method 12.7.1.1 or Annex W .....		—
	Test according to 12.7.1.1:		N
	- case of abnormal conditions.....		—
	- Ballast failure at supply voltage (V) .....		—
	- Components retained in place after the test		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- Test with standard test finger after the test		N
	Test according to Annex W:		N
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Table 3.15 (13.2.1)	N
3.12 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un.....:		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C).....:		—
	Ball-pressure test.....:	See Table 3.15 (13.2.1)	N
3.12 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N
	- case of abnormal conditions.....:		—
	- Components retained in place after the test		N
	- Test with standard test finger after the test		N
3.12 (12.7.2)	Luminaire with temperature sensing control		N
	- thermal link.....:	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out.....:	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out.....:	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions.....:		—
	- highest measured temperature of fixing point/exposed part (°C):.....:		—
	Ball-pressure test.....:	See Table 3.15 (13.2.1)	N
3.12.1 (-)	Temperature reduction if for outdoor use only		N
3.12.2 (-)	(See above)		—



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict

3.12.3 (-)	Glass covers used within the thermal limits declared by the glass manufacturer		N
------------	--	--	---

3.13 (9)	RESISTANCE TO DUST AND MOISTURE		—
3.13.1 (-)	If IP > IP 20 the order of tests as specified in clause 3.12		P
3.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		—
	- classification according to IP.....	IP65	—
	- mounting position during test.....	According to manual	—
	- fixing screws tightened; torque (Nm).....		—
	- tests according to clauses.....	Cl.9.2.2 and Cl.9.2.6	—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		P
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N
	d) no water in watertight or pressure watertight luminaire		N
	e) no contact with live parts (IP 2X)		N
	e) no entry into enclosure (IP 3X and IP 4X)		N
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N
	f) no trace of water on part of lamp requiring protection from splashing water		P
	g) no damage of protective shield or glass envelope		N
3.13 (9.3)	Humidity test 48 h		P

3.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		—
3.14 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø .....		—





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	Insulation resistance (MΩ)..... :		—
	SELV		P
	- between current-carrying parts of different polarity:		N
	- between current-carrying parts and mounting surface..... :	More than 100 MΩ	P
	- between current-carrying parts and metal parts of the luminaire..... :	More than 100 MΩ	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N
	- Insulation bushings as described in Section 5 ..... :		N
	Other than SELV		P
	- between live parts of different polarity..... :		N
	- between live parts and mounting surface..... :	More than 100 MΩ	P
	- between live parts and metal parts..... :	More than 100 MΩ	P
	- between live parts of different polarity through action of a switch..... :		N
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N
	- Insulation bushings as described in Section 5 ..... :		N
3.14 (10.2.2)	Electric strength test		P
	Dummy lamp		N
	Luminaires with ignitors after 24 h test		N
	Luminaires with manual ignitors		N
	Test voltage (V)..... :		N
	SELV		P
	- between current-carrying parts of different polarity:		N
	- between current-carrying parts and mounting surface..... :	500V	P
	- between current-carrying parts and metal parts of the luminaire..... :	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
	- Insulation bushings as described in Section 5 ..... :		N
	Other than SELV		P
	- between live parts of different polarity..... :		N
	- between live parts and mounting surface..... :	1554V	P
	- between live parts and metal parts..... :	1554V	P
	- between live parts of different polarity through action of a switch..... :		N
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N
	- Insulation bushings as described in Section 5 ..... :		N
3.14 (10.3)	Touch current or protective conductor current (mA):	Max.0.46mA<3.5mA	P

3.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		—
3.15 (13.2.1)	Ball-pressure test..... :	See Test Table 3.15 (13.2.1)	P
3.15 (13.3.1)	Needle-flame test (10 s)..... :	See Test Table 3.15 (13.3.1)	P
3.15 (13.3.2)	Glow-wire test (650°C)..... :	See Test Table 3.15 (13.3.2)	P
3.15 (13.4)	Proof tracking test (IEC 60112)..... :	See Test Table 3.15 (13.4)	N



IEC 60598-2-3							
Clause	Requirement - Test	Result - Remark					Verdict
<b>3.7 (11.2)</b>	<b>TABLES: Creepage distances and clearances</b>						P
<b>Table 11.1</b>	<b>Minimum distances (mm) for a.c. (50/60 Hz) sinusoidal voltages</b>						P
RMS working voltage (V) not exceeding	50	150	250	500	750	1000	
<b>Creepage distances</b>							
Required basic insulation, PTI ≥ 600	0,6	0,8	1,5	3	4	5,5	
Measured	-	-	-	-	-	-	
Required basic insulation, PTI < 600	1,2	1,6	2,5	5	8	10	
Measured (between LED PCB live parts and accessible parts)	>1.2	-	-	-	-	-	
Required supplementary insulation PTI ≥ 600	-	0,8	1,5	3	4	5,5	
Measured	-	-	-	-	-	-	
Required supplementary insulation PTI < 600	-	1,6	2,5	5	8	10	
Measured	-	-	-	-	-	-	
Required reinforced insulation	-	3,2	5	6	8	11	
Measured	-	-	-	-	-	-	
<b>Clearances</b>							
Required basic insulation	0,2	0,8	1,5	3	4	5,5	
Measured (between LED PCB live parts and accessible parts)	>0.2	-	-	-	-	-	
Required supplementary insulation	-	0,8	1,5	3	4	5,5	
Measured	-	-	-	-	-	-	
Required reinforced insulation	-	1,6	3	6	8	11	
Measured	-	-	-	-	-	-	
<b>Table 11.2</b>	<b>Minimum distances (mm) for non-sinusoidal pulse voltages</b>						N





IEC 60598-2-3							
Clause	Requirement - Test			Result - Remark			Verdict
Rated pulse voltage (peak kV)	2,0	2,5	3,0	4,0	5,0	6,0	8,0
Required clearances	1,0	1,5	2	3	4	5,5	8
Measured	-	-	-	-	-	-	-
Rated pulse voltage (peak kV)	10	12	15	20	25	30	40
Required clearances	11	14	18	25	33	40	60
Measured	-	-	-	-	-	-	-
Rated pulse voltage (peak kV)	50	60	80	100	-	-	-
Required clearances	75	90	130	170	-	-	-
Measured	-	-	-	-	-	-	-

3.15 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm) .....				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
LED cover	--	102	1.2	
AC Terminals	--	125	0.9	
Supplementary information:--				

3.15 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
AC Terminals	--	10s	No	0	Pass
Supplementary information:--					

3.15 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				P
Glow wire temperature .....		650°C		—	
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
LED cover	See annex 1	No	0	Pass	



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No).....:			Yes
Supplementary information: --			

3.15 (13.4) TABLE: Proof tracking test (IEC 60112)			N
Test voltage PTI .....	175 V		—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens	Verdict
--	--	--	--
Supplementary information: --			



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict

ANNEX 1	TABLE: Critical components information					P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
power cord	Lucky United Electric Wire	H05RN-F	300 /500V, 3 x 1,0 mm <sup>2</sup>	--	UL E472396	
LED module input cord	JUNHAO WIRE TECHNOLOGY CO LTD (DONGGUAN)	AWM	18AWG, 105°C	--	UL E357447	
LED driver For AOK-110WiS-NV-XX-XX-XXXX-BN-P	INVENTRONICS (HANGZHOU) INC	EUK-150S350DT	INPUT:AC100-277V, 50/60Hz OUTPUT:22-61Vdc 3.5A	EN 61347-1 EN 61347-2-13	UL E328335	
LED driver For AOK-150WiS-NV-XX-XX-XXXX-BN-P	INVENTRONICS (HANGZHOU) INC	EUK-150S350DT	INPUT:AC100-277V 50/60Hz OUTPUT:22-61Vdc 3.5A	EN 61347-1 EN 61347-2-13	UL E328335	
LED driver For AOK-300WiS-NV-XX-XX-XXXX-BN-P	INVENTRONICS (HANGZHOU) INC	EUD-320S670DT	INPUT:AC100-277V 50/60Hz OUTPUT:24-68Vdc 6.7A	EN 61347-1 EN 61347-2-13	UL E328335	
Plastic cover	IDEMITSU KOSAN CO LTD	LEV2200KL	V-0, 110°C	--	UL E48268	
LED chip	PHILIPS	LUXEON5050	Vf:5.8-6.6V DC 3000-5700K	EN 62471	Test with appliance	
PCB of LED module	SHENZHEN KAICHANGHONG CIRCUIT CO LTD	HX001	V-0, 90°C	--	UL E488718	





IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict

ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12		P
	Type reference.....	AOK-300WiS-NV-XX-XX-XXXX-BN-P	—
	Lamp used.....	LED	—
	Lamp control gear used.....	See annex 1	—
	Mounting position of luminaire.....	As in normal use	—
	Supply wattage (W).....	294.7W	—
	Supply current (A).....	1.062A	—
	Calculated power factor.....	0.943	—
	Table: measured temperatures corrected for ta = 50 °C:		P
	- abnormal operating mode.....	--	—
	- test 1: rated voltage.....	--	—
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage.....	1,06x277V=293.6V	—
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage.....	--	—
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....	--	—
	Through wiring or looping-in wiring loaded by a current of A during the test .....	--	—

**Temperature measurements, (°C)**

Part	Clause 12.4 – normal				Clause 12.5 – abnormal	
	test 1	test 2	test 3	limit	test 4	limit
Input wire of LED driver	--	77.6	--	90	--	--
Tc of LED driver	--	89.1	--	Ref.	--	--
Output wire of LED driver	--	53.9	--	Ref.	--	--
LED module	--	83.1	--	130	--	--
LED cover	--	76.1	--	Ref.	--	--
Metal enclosure	--	71.1	--	90	--	--
Mounting surface	--	69.6	--	90	--	--
Lighted object(10cm)	--	60.9	--	Ref.	--	--

Supplementary information:--



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
<b>ANNEX 3</b>	<b>Screw terminals (part of the luminaire)</b>		<b>N</b>
<b>(14)</b>	<b>SCREW TERMINALS</b>		<b>N</b>
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		<b>N</b>
(14.3.2.2)	Special preparation		<b>N</b>
(14.3.2.3)	Terminal size		<b>N</b>
	Cross-sectional area (mm <sup>2</sup> )..... :		—
(14.3.3)	Conductor space (mm)..... :		<b>N</b>
(14.4)	Mechanical tests		<b>N</b>
(14.4.1)	Minimum distance		<b>N</b>
(14.4.2)	Cannot slip out		<b>N</b>
(14.4.3)	Special preparation		<b>N</b>
(14.4.4)	Nominal diameter of thread (metric ISO thread)..... :	M	<b>N</b>
	External wiring		<b>N</b>
	No soft metal		<b>N</b>
(14.4.5)	Corrosion		<b>N</b>
(14.4.6)	Nominal diameter of thread (mm)..... :		<b>N</b>
	Torque (Nm)..... :		<b>N</b>
(14.4.7)	Between metal surfaces		<b>N</b>
	Lug terminal		<b>N</b>
	Mantle terminal		<b>N</b>
	Pull test; pull (N)..... :		<b>N</b>
(14.4.8)	Without undue damage		<b>N</b>



IEC 60598-2-3			
Clause	Requirement - Test	Result - Remark	Verdict
<b>ANNEX 4</b>	<b>Screwless terminals (part of the luminaire)</b>		<b>N</b>
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>		<b>N</b>
(15.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(15.3.1)	Material		N
(15.3.2)	Clamping		N
(15.3.3)	Stop		N
(15.3.4)	Unprepared conductors		N
(15.3.5)	Pressure on insulating material		N
(15.3.6)	Clear connection method		N
(15.3.7)	Clamping independently		N
(15.3.8)	Fixed in position		N
(15.3.10)	Conductor size		N
	Type of conductor		N
(15.5)	Terminals and connections for internal wiring		N
(15.5.1)	Mechanical tests		N
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:	4N	N
	Insertion force not exceeding 50 N		N
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N
(15.5.2)	Electrical tests		N
	Voltage drop (mV) after 1 h (4 samples).....:		N
	Voltage drop of two inseparable joints		N
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N
(15.6)	Terminals and connections for external wiring		N





IEC 60598-2-3											
Clause	Requirement - Test									Result - Remark	Verdict
(15.6.1)	Conductors										N
	Terminal size and rating										N
15.6.2	Mechanical tests										N
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) .....										N
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) .....										N
(15.6.3)	Electrical tests										N
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N
<b>(15.6.3.2)</b>	<b>TABLE: Contact resistance test</b>										N
	Voltage drop (mV) after 1 h										—
	terminal	1	2	3	4	5	6	7	8	9	10
	voltage drop (mV)	--	--	--	--	--	--	--	--	--	--
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV).....										—
	terminal	1	2	3	4	5	6	7	8	9	10
	voltage drop (mV)	--	--	--	--	--	--	--	--	--	--
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV).....										—
	terminal	1	2	3	4	5	6	7	8	9	10
	voltage drop (mV)	--	--	--	--	--	--	--	--	--	--
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV).....										—
	terminal	1	2	3	4	5	6	7	8	9	10
	voltage drop (mV)	--	--	--	--	--	--	--	--	--	--
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV).....										—
	terminal	1	2	3	4	5	6	7	8	9	10
	voltage drop (mV)	--	--	--	--	--	--	--	--	--	--
Supplementary information:											

**Attachment 1: Test report of EN 62471**

Clause	Requirement + Test	Result – Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps								P
Risk	Action spectrum	Symbol	Units	Emission Measurement						
				Exempt		Low risk		Mod risk		
				Limit	Result	Limit	Result	Limit	Result	
Actinic UV	$S_{UV}(\lambda)$	$E_s$	$W \cdot m^{-2}$	0,001	0	—	—	—	—	
Near UV		$E_{UVA}$	$W \cdot m^{-2}$	0,33	0,13418	—	—	—	—	
Blue light	$B(\lambda)$	$L_B$	$W \cdot m^{-2} \cdot sr^{-1}$	100	37,4	10500	—	4000000	—	
Blue light, small source	$B(\lambda)$	$E_B$	$W \cdot m^{-2}$	0,01*	---	1,0	—	400	—	
Retinal thermal	$R(\lambda)$	$L_R$	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	962	$31000/\alpha$	—	$71000/\alpha$	—	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	$L_{IR}$	$W \cdot m^{-2} \cdot sr^{-1}$	—		—		—		
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$		—		—		
IR radiation, eye	—	$E_{IR}$	$W \cdot m^{-2}$	100	2,32821	570	—	3200	—	

\* Small source defined as one with  $\alpha < 0,011$  radian. Averaging field of view at 10000 s is 0,1 radian.  
\*\* Involves evaluation of non-GLS source

Attachment 2: Test report of EN 62031			
Clause	Requirement - Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL REQUIREMENTS</b>		—
4.4	Integral modules tested assembled in the luminaire		P
4.5	Independent modules complies with requirements in IEC 60598-1		N
<b>5</b>	<b>GENERAL TEST REQUIREMENTS</b>		—
5.5	SELV-operated LED modules comply with Annex I of IEC 61347-2-13	(see Annex 1)	N
	General conditions for tests in Annex A	(see Annex A)	P
<b>6</b>	<b>CLASSIFICATION</b>		—
	Built-in module .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent module.....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral module .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	For Integral module; Note to 1.2.1 in IEC 60598-1 applies.		—
<b>7</b>	<b>MARKING</b>		—
	Requirements not applicable to the evaluated product.		N
<b>8</b>	<b>TERMINALS</b>		—
	Screw terminals according section 14 of IEC 60598-1:		N
	Separately approved; component list	(see Annex 2)	N
	Part of the luminaire	(see Annex 3)	N
	Screwless terminals according section 15 of IEC 60598-1:		N
	Separately approved; component list	(see Annex 2)	N
	Part of the luminaire	(see Annex 4)	N
	Connectors according IEC 60838-2-2:		N
	Separately approved; component list	(see Annex 2)	N
<b>9 (9)</b>	<b>PROVISION FOR PROTECTIVE EARTHING</b>		—
	Requirements not applicable to the evaluated product.		N



Attachment 2: Test report of EN 62031			
Clause	Requirement - Test	Result - Remark	Verdict
<b>10 (10)</b>	<b>PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS</b>		—
	Requirements not applicable to the evaluated product.		N
<b>11 (11)</b>	<b>MOISTURE RESISTANCE AND INSULATION</b>		—
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (MΩ):		P
	For basic insulation $\geq 2 \text{ M}\Omega$ .....		N
	For double or reinforced insulation $\geq 4 \text{ M}\Omega$ .....	100MΩ	P
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N
<b>12 (12)</b>	<b>ELECTRIC STRENGTH</b>		—
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P
	Working voltage $\leq 50 \text{ V}$ , test voltage 500 V		N
	Working voltage $> 50 \text{ V} \leq 1000 \text{ V}$ , test voltage (V):		N
	Basic insulation, $2U + 1000 \text{ V}$		N
	Supplementary insulation, $2U + 1000 \text{ V}$		N
	Double or reinforced insulation, $4U + 2000 \text{ V}$		N
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N
<b>13 (14)</b>	<b>FAULT CONDITIONS</b>		—
- (14)	When operated under fault conditions the controlgear:		N
	- does not emit flames or molten material		N
	- does not produce flammable gases		N
	- protection against accidental contact not impaired		N
	Thermally protected controlgear does not exceed the marked temperature value		N

Attachment 2: Test report of EN 62031			
Clause	Requirement - Test	Result - Remark	Verdict
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	N
- (14.1)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts)	(see appended table)	N
	Creepage distances on printed boards less than specified in clause 16 in Part 1 provided with coating according to IEC 60664-3		N
- (14.2)	Short-circuit or interruption of semiconductor devices	(see appended table)	N
- (14.3)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N
- (14.4)	Short-circuit across electrolytic capacitors	(see appended table)	N
- (14.5)	After the tests has been carried out on three samples:		N
	The insulation resistance $\geq 1 M\Omega$ .....		N
	No flammable gases		N
	No accessible parts have become live		N
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		N
- (14.6)	Relevant fault condition tests with high-power supply		N
<b>13.2</b>	<b>Overpower condition</b>		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
<b>15</b>	<b>CONSTRUCTION</b>		—
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P

Attachment 2: Test report of EN 62031			
Clause	Requirement - Test	Result - Remark	Verdict
<b>16 (16)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		—
- (16)	Creepage and distances and clearances in compliance with IEC 61347-1		P
	Insulating lining of metallic enclosures		P
	Basic insulation on printed boards tested according to clause 14		N
	Distances subjected to both sinusoidal voltage as non-sinusoidal pulses not less than value in Table 16		P
	Creepage distances not less than minimum clearance		P
16 (-)	Conductive accessible parts in compliance with applicable parts of IEC 60598-1		N
<b>17 (17)</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		—
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		P
<b>18 (18)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		—
- (18.1)	Ball-pressure test.....	See Test Table 18 (18.1)	N
- (18.3)	Glow- wire test (650°C) .....	See Test Table 18 (18.3)	N
- (18.4)	Needle-flame test (10 s) .....	See Test Table 18 (18.4)	N
- (18.5)	Proof tracking test .....	See Test Table 18 (18.5)	N
<b>19 (19)</b>	<b>RESISTANCE TO CORROSION</b>		—
	- test according 4.18.1 of IEC 60598-1		N
	- adequate varnish on the outer surface		N
<b>20</b>	<b>INFORMATION FOR LUMINAIRE DESIGN</b>		—
	Information in Annex D (informative)		N
<b>21</b>	<b>HEAT MANAGEMENT</b>		—
<b>21.1</b>	<b>General</b>		N
	Exchangeability is safeguarded by cap or base		N
<b>21.2</b>	<b>Heat-conducting foil and paste</b>		N



Attachment 2: Test report of EN 62031			
Clause	Requirement - Test	Result - Remark	Verdict
	Heat-conducting foil delivered with the module if necessary		N
<b>22</b>	<b>PHOTOBIOLOGICAL SAFETY</b>		—
<b>22.1</b>	<b>UV radiation</b>		N
	Luminous radiation not exceed 2mW/klm		N
<b>22.2</b>	<b>Blue light hazard</b>		P
	Assessed according to IEC TR 62778	RG0	P
<b>22.3</b>	<b>Infrared radiation</b>		N
	Requirements for infrared radiation when required		N
<b>A</b>	<b>ANNEX A - TESTS</b>		—
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		P
	<b>ANNEX 1 - SELV-operated LED modules</b>		—
	SELV-operated LED modules in compliance with Annex I of IEC 61347-2-13		N

Attachment 3: Test report of EN 62493					
Clause	Requirement + Test	Result - Remark	Verdict		
<b>4.2</b>	<b>APPLICATION OF LIMITS (Test summary)</b>			—	
	Specific absorption rate (SAR)			—	
a)	CISPR 15 clause 4.3.1 Disturbance voltage mains terminals 20 kHz – 30 MHz	*)	P		
b)	CISPR 15 clause 4.4 Radiated electromagnetic disturbances 100 kHz – 30 MHz	*)	P		
c)	CISPR 15 clause 4.4.2 Radiated electromagnetic disturbances 30 MHz – 300 MHz	*)	P		
*)	<input checked="" type="checkbox"/> See separate Test Report for measurements of a), b) and c) above <input type="checkbox"/> Only measurement of d) below. See measurement results below. In this case this test report does not show compliance with EN 62493.			—	
	Induced current density			P	
d)	Induced current density 20 kHz – 10 MHz	See measurement results Below		P	
<b>4.2.d</b>	<b>INDUCED CURRENT DENSITY</b>			—	
	Power supply system utilised:			—	
	Voltage.....	AC 100-277V		—	
	Frequency.....	50/60Hz		—	
	Environmental conditions:			—	
	Temperature .....	25°C		—	
	Humidity.....	93%		—	
	EuT operation mode:			—	
	<input checked="" type="checkbox"/> Normal operation			—	
	<input type="checkbox"/> Other operation:			—	
<b>4.2.d</b>	<b>MEASUREMENT RESULTS</b>			—	
	Measuring with “Van der Hoofden” test head			—	
	Location of EuT	Measuring distance	Result (F)	Limit (F)	Verdict
	Front of EUT	30 cm	0,31	0,85	P
	Rear of EUT	30 cm	0,29	0,85	P
	Side of EUT	30 cm	0,33	0,85	P

<b>Attachment 4: EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</b> according to EN 60598-2-3:2003+A1:2011 and EN 60598-1:2015			
Clause	Requirement + Test	Result - Remark	Verdict
<b>CENELEC COMMON MODIFICATIONS (EN)</b>			—
<b>3.5 (3)</b>	<b>MARKING</b>		—
3.5 (3.3.101)	For luminaires not supplied with terminal block: Adequate warning on the package		P
<b>3.6 (4)</b>	<b>CONSTRUCTION</b>		—
3.6 (4.11.6)	Electro-mechanical contact systems		N
<b>3.10 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		—
3.10 (5.2.1)	Connecting leads		P
	- without a means for connection to the supply		P
	- terminal block specified		N
	- relevant information provided		P
	- compliance with 4.6, 4.7.1, 4.7.2, 4.10.1, 11.2, 12 and 13.2 of Part 1		P
3.10 (5.2.2)	Cables equal to EN 50525		P
	Replace table 5.1 – Supply cord		P
<b>3.12 (12)</b>	<b>ENDURANCE TESTS AND THERMAL TESTS</b>		—
3.12 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring		P
<b>ZB</b>	<b>ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)</b>		—
(3.3)	DK: power supply cords of class I luminaires with label		N
(4.5.1)	DK: socket-outlets		N
(5.2.1)	CY, DK, FI, GB: type of plug		N
<b>ZC</b>	<b>ANNEX ZC, NATIONAL DEVIATIONS (EN)</b>		—
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N





Attachment 4: EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES according to EN 60598-2-3:2003+A1:2011 and EN 60598-1:2015			
Clause	Requirement + Test	Result - Remark	Verdict
	FR: Safety requirements for high buildings  (Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage)  Glow-wire test for outer parts of luminaires:		N
	- 850°C for luminaires in stairways and horizontal travel paths		N
	- 650°C for indoor luminaires		N
	GB: Requirements according to United Kingdom Building Regulation		N

**Attachment 5: Photo documentation**





**Attachment 5: Photo documentation**

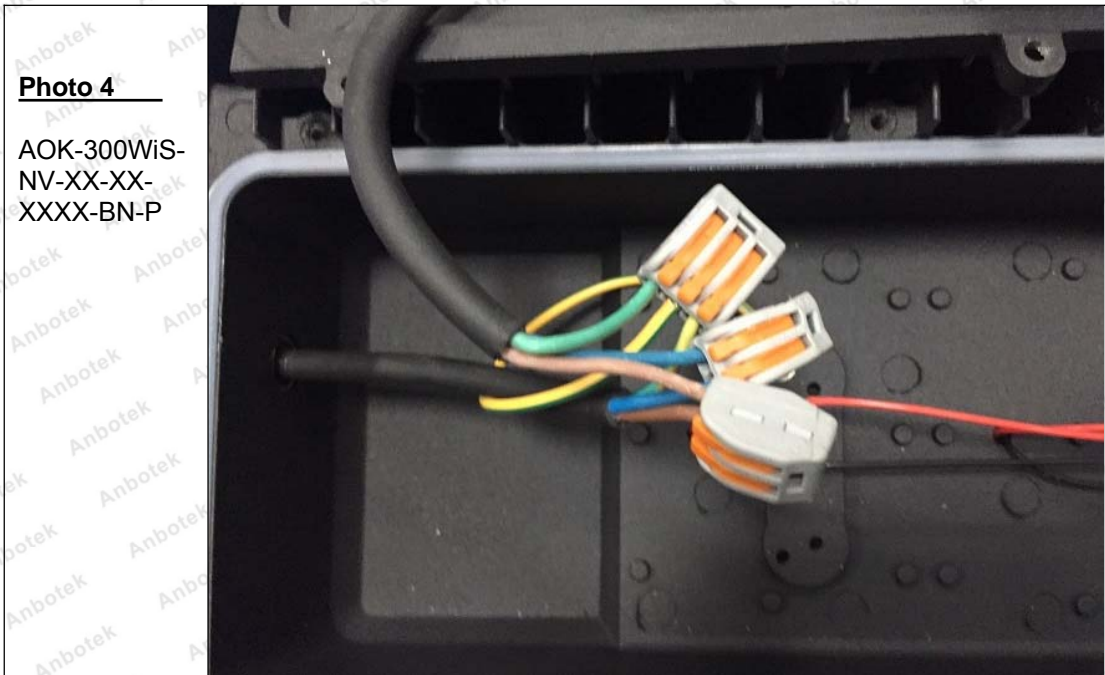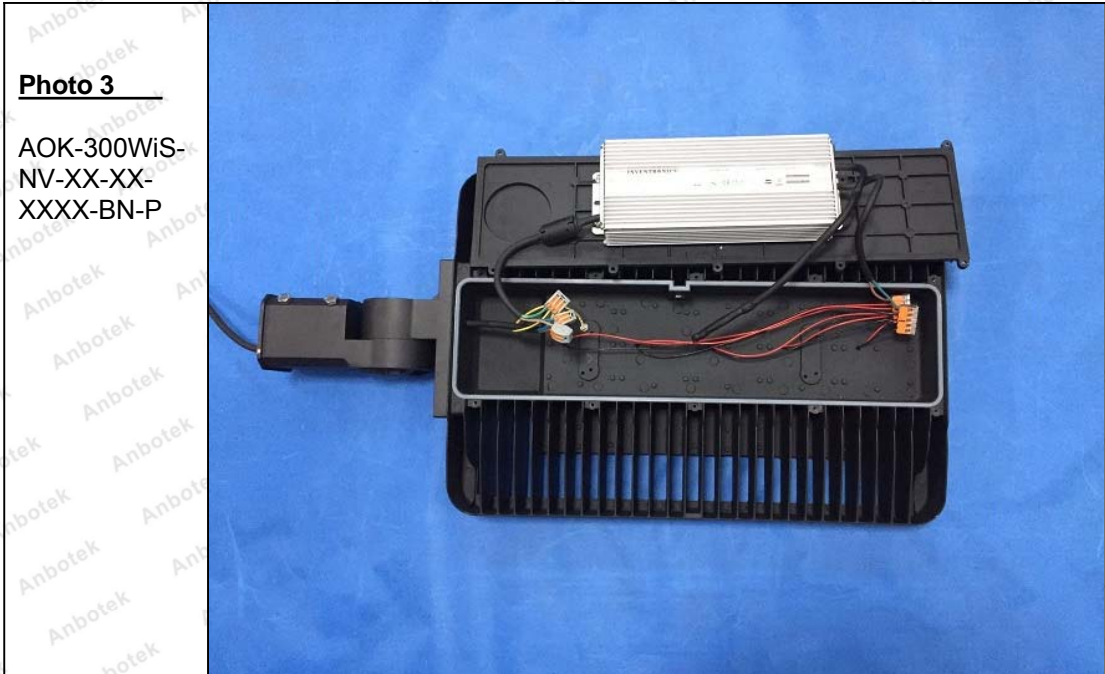



**Attachment 5: Photo documentation**


**Photo 5**

AOK-300WiS-  
NV-XX-XX-  
XXXX-BN-P



**Photo 6**

AOK-300WiS-  
NV-XX-XX-  
XXXX-BN-P

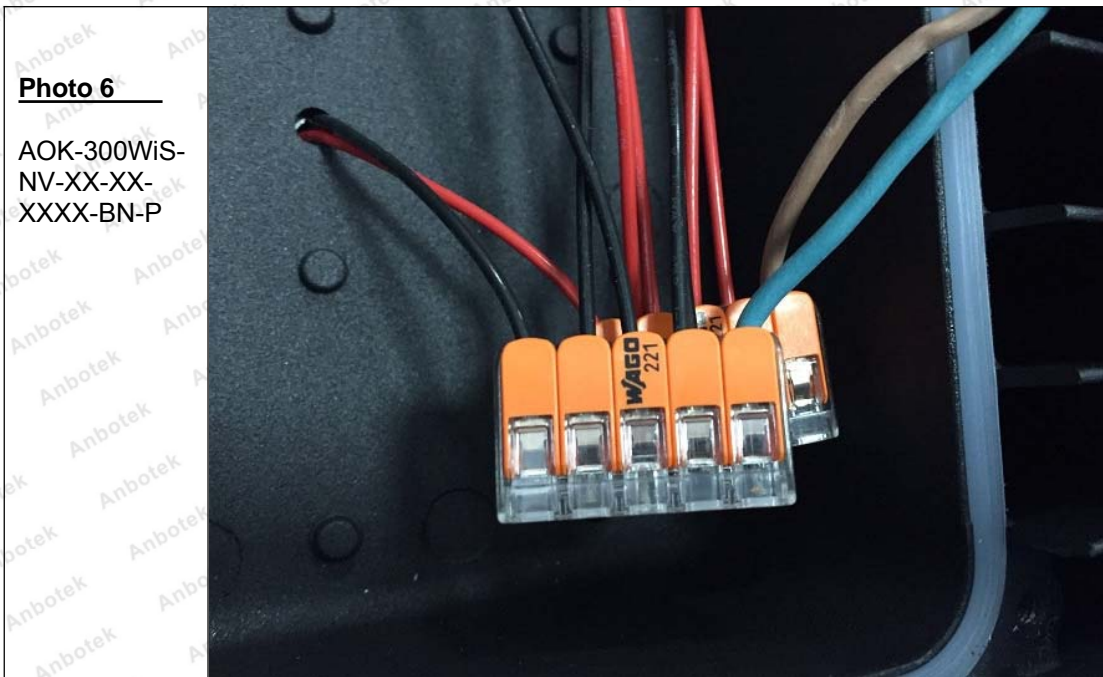

**Attachment 5: Photo documentation**

**Photo 7**

AOK-300WiS-  
NV-XX-XX-  
XXXX-BN-P



**Photo 8**

AOK-300WiS-  
NV-XX-XX-  
XXXX-BN-P



--- End of report ---